

# AVR-HN516E2N-FD

16 CH. 8MP NETWORK  
VIDEO RECORDER



## H.265 8MP NETWORK VIDEO RECORDER

8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 720P

DUAL NIC / NON-POE NVR

### FUNCTION

- Supports up to 16 Channels 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 960P / 720P IP Camera video input
- Supports H.265 High Profile Compression with Up to 50% Savings in bandwidth over H.264
  - Intuitive and User-Friendly Graphic User Interface (GUI)
  - 4K HDMI Output
- Multi-Mode Recording: Manual / Scheduled / Motion / Alarm / AI (Video Analytics)
  - Playback: 16 Channels Simultaneous Playback
- Search: Time Slice, Time, Event, Tag, Smart and Target Database Search
- Supports Multiple Video Analytics, such as Missing or Abandoned Object, Region Intrusion, Tripwire, Video Tampering, etc.
  - Supports POS Information Overlay on Live View and Playback
  - Quick and Easy Backup via USB, Network and Mobile App
- Pentaplex Operation: Live View, Record, Playback, Backup and Remote Access
  - Supports DHCP, DDNS, PPPoE and various other Network Protocols
  - Compatibility with a Variety of 3rd-Party IP Cameras including ONVIF, Hikvision, and Others
- Remote Access via Web Interface or AVYCON CVMS: Live Playback, Backup, PTZ, and System Configuration
- Dual Stream Technology allows for High Quality Local Recordings and Standard Quality Video for Mobile and Remote Access
  - Allows Simultaneous Online Users to Access Device
- Support PTZ Preset and Auto-Cruise, with Up to 255 Presets and 8 Cruise Paths
  - Support NAT Function and QR Code Scanning Mobile Apps, Eliminating the Need to Configure Port Forwarding
  - Powerful Mobile Apps on iOS and Android




# AVR-HN516E2N-FD

## 16 CH. 8MP NETWORK VIDEO RECORDER



### DIMENSIONS

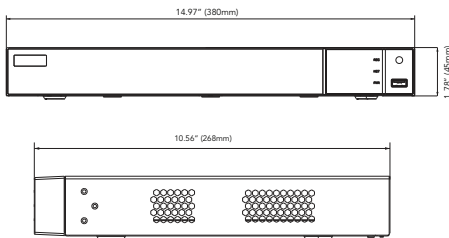

### REAR PANEL



### AVAILABLE HDD OPTIONS

- 1TB HDD: AVR-HN516E2N-FD-1T
- 2TB HDD: AVR-HN516E2N-FD-2T
- 3TB HDD: AVR-HN516E2N-FD-3T
- 4TB HDD: AVR-HN516E2N-FD-4T
- 6TB HDD: AVR-HN516E2N-FD-6T
- 8TB HDD: AVR-HN516E2N-FD-8T
- 12TB HDD: AVR-HN516E2N-FD-12T
- 16TB HDD: AVR-HN516E2N-FD-16T
- 20TB HDD: AVR-HN516E2N-FD-20T
- 24TB HDD: AVR-HN516E2N-FD-24T
- 28TB HDD: AVR-HN516E2N-FD-28T
- 32TB HDD: AVR-HN516E2N-FD-32T
- 36TB HDD: AVR-HN516E2N-FD-36T
- 42TB HDD: AVR-HN516E2N-FD-42T
- 48TB HDD: AVR-HN516E2N-FD-48T
- 56TB HDD: AVR-HN516E2N-FD-56T
- 64TB HDD: AVR-HN516E2N-FD-64T

### MOBILE APP

AVYCON Mobile CVMS



### DESCRIPTION AVR-HN516E2N-FD

IP Video Input	16 Channels
Output	HDMI: 3840 x 2160 @ 60fps; 3840 x 2160, 1920 x 1080, 1280 x 1024, 1024 x 768 @ 30 fps VGA x 1: 1920 x 1080 / 1280 x 1024 / 1024 x 768
IP Video Input Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 x 1024 / 960P / 720P / 960H / D1 / CIF
Incoming Bandwidth (Mbps)	160
Outgoing Bandwidth (Mbps)	160
Video Compression	Standard H.264 / H.265
Network Input	16 Channel IPC Audio Input
Local Output	RCA x 1
2-Way Audio	RCA x 1
Audio Compression	G.711 (U/A)
Resolution	8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 x 1024 / 960P / 720P / 960H / D1 / CIF
Frame Rate	30 fps (NTSC) / 25 fps (PAL)
Record Stream	Dual Stream Recording
Smart Search	Recorded Events are Color-Coded to Reflect the Specific Type of Event that was Recorded (Scheduled, Motion, Alarm, Etc.)
Search	Time slice / Time / Event / Tag Search
Simultaneous Playback	Max 16 Channels
Live / Playback	1 Channel @ 8 MP / 4 Channels @ 1080P
Function	Play, Pause, FF, FB, Digital Zoom, Etc.
Alarm Input	8 Channels Local Alarm Input; IPC Alarm Input Supported
Alarm Output	4 Channels
Mode	Manual, Sensor, Motion, Exception, Smart Events
Triggering	Record, Snap, Preset, E-Mail, Etc.
Face Detection (Camera Detection)	16 Channels
Face Detection (NVR Detection)	32 Channels
Face Match Performance	16 Channels
Face Picture Database	32 Libraries; 5,000 Face Pictures
Comparison Capability	180 Pictures / minute
Face Picture Adding	Ability to Add Face Pictures via Mobile App, Web Interface, and NVR Local GUI
Face Picture Search	Yes
Face Tracking	Yes
Database Management	Add, Modify, Delete, and Search Face Pictures
Face Picture Comparison	Supports Standard Comparison, with the Ability to Add Faces to an Allowed or Block List
Face Track Map	Resolution: ≤2560 x 1920; Size: ≤512KB; Formats: .jpg, .jpeg
External Face Picture Enrollment	Resolution: 128 x 128 ~ 1920 x 1080; Size: ≤70KB; Formats: .jpg, .jpeg
Face Info Statistic Mode	Statistics by Day, Week, Month, Quarter as well as Customized Time Period
Face Info Statistic Graph	Bar Graph, Pie Chart
HDD Interface	SATA x 2, Max 10T per HDD
Network Backup	Yes
Local Backup	USB Flash Drive, USB Mobile HDD
Interface	RJ45 10 / 100 / 1,000 Mbps x 2
Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x
RS 485	Yes (Full-Duplex), Connect to PTZ keyboard
Reset	Yes
Remote Controller	Optional
USB	USB 2.0 x 2, USB 3.0 x 1
Power Supply	DC12V/4A
Power Consumption	<10W (Without HDD)
Working Environment	14F ~ 122F (-10 ~ 50C), 10% ~ 90% humidity
Dimensions	14.97" x 10.56" x 1.78" (380mm x 268mm x 45mm)



**AVYCON**<sup>®</sup>

Copyright © AVYCON. All rights reserved. Specifications and pricing are subject to change without notice.

phone: 949-752-7606 / 888-833-4611 (Canada Toll-Free)

email: info@avycon.com

social: @avycon\_aivo

website: avycon.com